


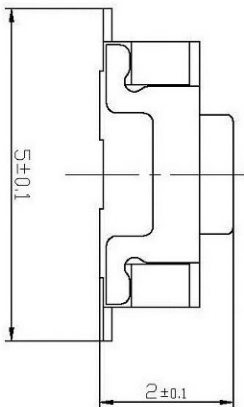



REV	ECN	N.D.	APPD
A	HC-12-0050		PRD/JDM

规格 Specifications

额定负荷 Rating	DC 12V/50mA		
接触电阻 Contact Resistance	100mΩ max.		
绝缘电阻 Insulation resistance	DC:100V 50S 100MΩ min.		
抗电强度 Dielectric strength	AC250V(50~60Hz) 50S min.		
操作力 Operation force	≤ 180±30gf	250±50gf	
寿命试验 Operating Life	100,000 cycles	50,000 cycles	
行程 Travels	0.20±0.1mm		

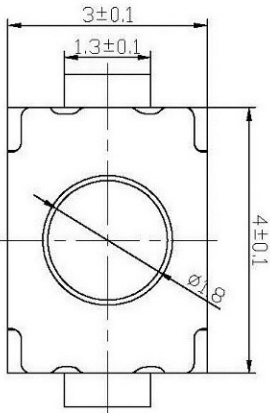

PRODUCT NO.: 1TS008A****-*****-CT

轻触开关

3X4立式小龟系列

外形:

按钮颜色:

底座颜色:

盖板颜色:

操作力度:

初始颜色, 则不启用

180=180gf

250=250gf

手感:

0=常规

1=大手感

2=小手感

材料:

0=初始材料

1=新增材料

依次增加

编带

非编带, 不启用

产品高度 (H):

200=2.00mm

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
6	盖板	1	不锈钢	酸洗
5	按钮	1	LCP	黑
4	防尘膜	/	0.05 (机贴)	/
3	弹片	2	SUS301	镀银
2	底座	1	LCP	黑
1	卡件	1	磷铜0.2	镀银

X. ± 0.3	X' ± 3'	UNITS	NAME (INTENDED USE)	HON YUAN
X. ± 0.2	X' ± 2'	MAT'L	3X4立式小龟无柱	HON YUAN PRECISION IND. CO., LTD.
.XX ± 0.1	.XX' ± 1'	FINISH	PART NO. (INTENDED USE)	SHEENZHEN, CHINA, R.O.C.
.XXX ± 0.05	.XXX' ± 0.5'	QTY	1TS008A****-*****-*****	PRODUCT DRAWING
THESE DRAWINGS AND SPECIFICATIONS ARE TO BE USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF HON YUAN PRECISION IND. CO., LTD.		CHKD:	MDL 8/21/2012	DWG NO.: 1TS008A
DR: S.LLI 8/21/2012		SCALE	10/1	SHEET 1/1
		REV.	A	