

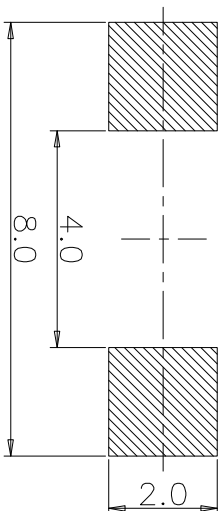

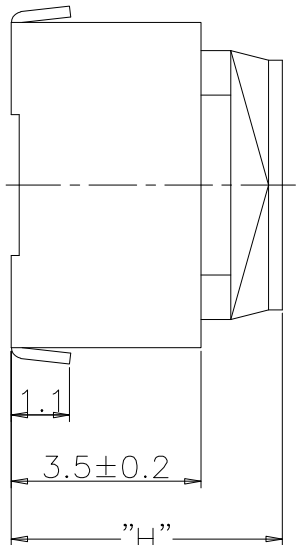


REV	ECN NO.	APPD
A	HC240194	PRIOUJOM

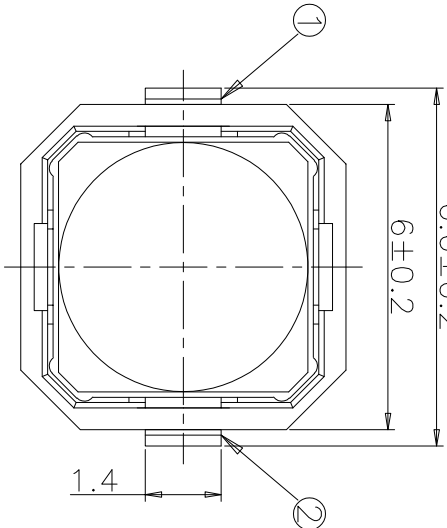

CIRCUIT DIAGRAM
回路图

规格 Specifications

额定负荷 Rating	DC 12V/50mA
接触电阻Contact Resistance	100mΩ max.
绝缘电阻Insulation resistance	DC100V 60S 100MΩ min.
抗电强度Dielectric strength	AC250V (50~60Hz) 60S min.
操作力Operation force	300±50gf
寿命试验Operating life	100,000cycles
行程Travels	看左侧编码说明

PRODUCT NO. : 1TS009*****-CT

RECOMMENDED P.C.B. LAYOUT
安装尺寸图

轻触开关
TMRV 系列

外形: A=弧盖弯脚
B=平盖弯脚
C=弧盖平脚
D=平盖平脚

按钮颜色:
底座颜色:
盖板颜色:

操作力度: 0=常規 30~45%
1=大手感 45~75%
2=小手感 30% Max
3=特殊手感

材质: 0=LCP
1=新增材质
依次增加

产品高度(H): 430=4.3mm (行程: 0.7±0.2mm)
500=5.0mm (行程: 1.3±0.2mm)

编带
非编带, 不启用

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
5	COVER	1	LCP	BLACK
4	ACTUATOR	1	SILICONE	/
3	CONTACT	1	STAINLESS STEEL	Ag-PLATED
2	TERMINAL	2	BRASS	Ag-PLATED
1	HOUSING	1	LCP	BLACK

X. ± 0.3	X' ± 3'	UNITS	MM	NAME(INTENDED USE)	HON YUAN
X ± 0.2	X' ± 2'	MATL		TMRV SERIES TACT SWITCH	HON YUAN PRECISION IND. CO.,LTD. GUANGDONG, CHINA.
.XX ± 0.1	.XX' ± 1'	FINISH		PART NO.(INTENDED USE)	TITLE:
.XXX ± 0.05	.XXX' ± 0.5'			1TS009A-3001-5000-CT	PRODUCT DRAWING
APPD: W.P.LU 2024.09.19		DWG NO.: 1TS009A			
CHKD: S.L.II 2024.09.19		SCALE SHEET		REV.	
DR: C.L.I 2024.09.19		10/1		1/1	
				A	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL REMAIN THEIR PROPERTY. NO COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.