




规格 Specifications	
额定负荷 Rating	DC 12V/0.5A
接触电阻 Contact Resistance	$\leq 0.03\Omega$
绝缘电阻 Insulation resistance	DC100V 60S 100M $\Omega$ min.
抗电强度 Dielectric strength	AC250V(50-60Hz) 60S min.
操作力 Operation force	360-50gf
寿命试验 Operating Life	100,000 cycles
行程 Travels	0.50 $\pm$ 0.1mm

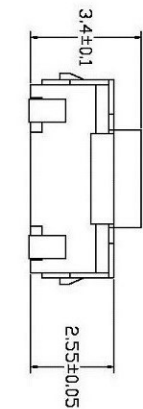

CIRCUIT DIAGRAM  
回路图



RECOMMENDED P.C.B. LAYOUT  
安装尺寸图

PRODUCT NO. : 1TS018A\*\*\*\*-\*\*\*\*-CT

轻触开关

6X6X3.4硅胶包脚系列

外形:

按钮颜色:

底座颜色:

盖板颜色:

操作力度:

160-160gf

260-260gf

360-360gf

手感:

0-常规

1-大手感

2-小手感

3-特殊手感

材质:

0-初始材质

1-新增材质

依次增加

产品高度(H):

3.40-3.4mm

非编带

编带, 不启用

X. ± 0.3	X. ± 0.2	X. ± 0.1	UNITS	MM	NAME(INTENDED USE)	HON YUAN
X. ± 0.3	X. ± 0.2	X. ± 0.1	MATL		6X6X3.4硅胶包脚	HON YUAN PRECISION IND. CO.,LTD.
X. ± 0.3	X. ± 0.2	X. ± 0.1	FINISH		1TS018AW***-****-****0	SHEENZHEN, CHINA, R.O.C.
X. ± 0.3	X. ± 0.2	X. ± 0.1	QTY		APPD: 20.4/27/2016	PRODUCT DRAWING
X. ± 0.3	X. ± 0.2	X. ± 0.1			CHD: M.H.I. 4/27/2016	DWG NO.: 1TS018AW
X. ± 0.3	X. ± 0.2	X. ± 0.1			DR: Y.Y.Chen 4/27/2016	SCALE SHEET
X. ± 0.3	X. ± 0.2	X. ± 0.1				10/1
X. ± 0.3	X. ± 0.2	X. ± 0.1				REV. A